



Technology Solutions

TEK-BAR 3110B

Smart Differential Pressure Transmitter



PRESSURE



Introduction


Tek-Bar 3110B Smart Differential Pressure Transmitter uses the world's advance single crystal silicon pressure sensor technology and state-of-the-art encapsulation technology. This is high performance pressure transmitter with HART communication protocol. It is used to measure liquid, gas, or steam flow; as well as liquid level, density, and pressure. It has accuracy up to 0.075% of URL and IP66 water-proof protection.

Measuring Principle

The Tek-Bar 3110B works on the principle of mono silicon technology. The pressure sensor of the transmitter is located on the top of the metal body, away from the service fluid. This enables mechanical and thermal isolation of the sensor from the fluid in service.

When pressure is applied on the diaphragm and the two pairs of piezo-resistors, they become stressed and undergo a change in voltage resistance. This change in resistance is directly proportional to the applied pressure, which is transferred to the transmitter body using lead wires.

Built on semiconductor technology, the resistance change (piezoelectric effect) is notably higher than exhibited in standard strain gauges. Therefore, the sensitivity of mono-crystalline sensors is higher than the sensitivity of most other types.

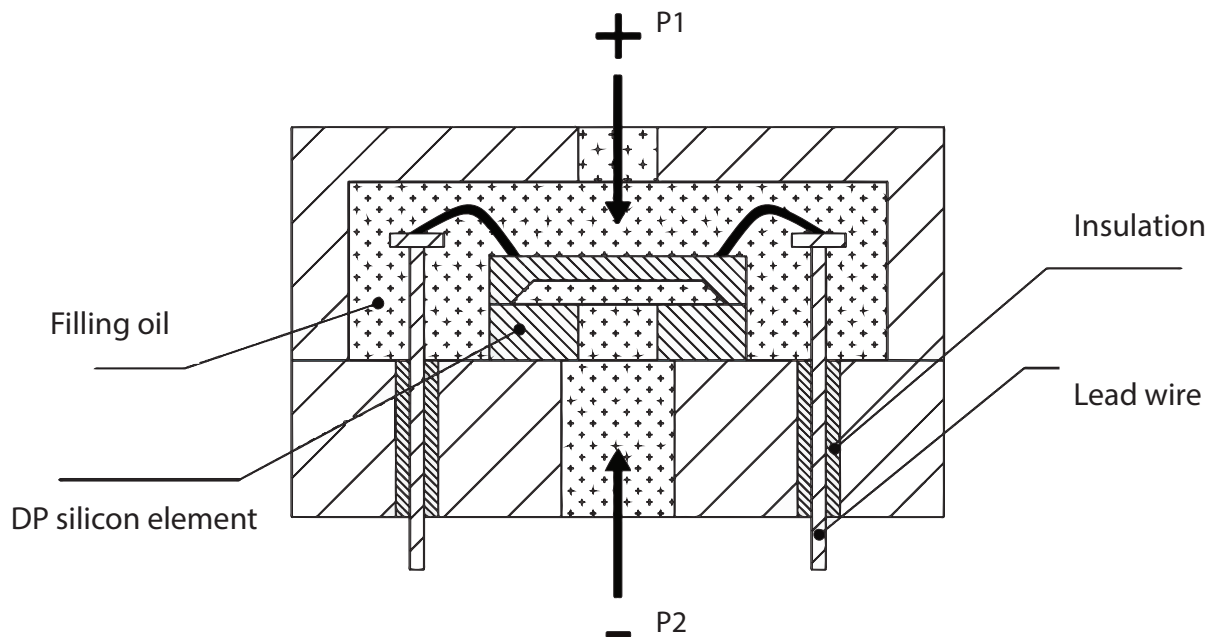

Benefits


- Digital communication HART protocol.
- High performance
- High accuracy up to $\pm 0.075\%$
- It can be used to measure liquid, gas, and steam flow as well as liquid level, density, and pressure
- Various Output: 4-20 mA, digital signals with HART® Communication (Modbus RS485)
- Multiple temperature and linearity compensation to improve accuracy
- Fully-sealed and fully isolated silicon pressure sensor
- Superior stainless steel process flange
- Dual diaphragm overload protection, it can easily cope with overload tests

Applications

- It is used in various industries like food and beverages, chemical, water and waste water industries.
- It is used to measure liquid, gas, or steam flow as well as liquid level, density, and pressure.

Dimensional Drawing

Drawing and Dimension with Display

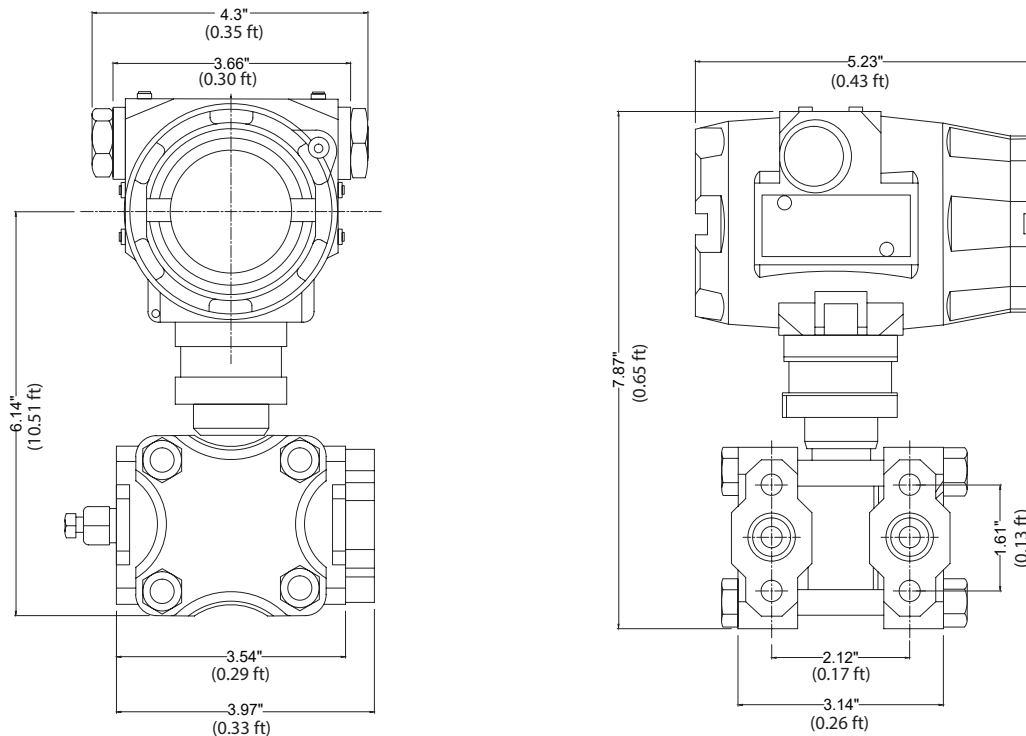

Specifications

Pressure Type	Differential Pressure
Reference Accuracy	±0.075% F.S., optional Enhanced Accuracy of ±0.065%, ±0.04%
Diaphragm Materials	Hastelloy C
Measuring Range	24" w.c. to 1450 psid
Stability	±0.2% URL/5 year
Working Temperature	-40°F to 185°F (-40°C to 85°C)
Working Humidity	5 to 100% RH at 104°F
Output Signal	4 mA to 20 mA with HART® Communication (Modbus RS485)
Electrical Connection	½" female NPT conduit
HART Loop Resistance	250 to 550 ohm
Process Connection	¼" NPT Female
Approvals	CE, CSA
Weight (Excluding Option Items)	8.81lb (without mounting bracket and process connection adapter)
Testing Standard	GB / T28474 / IEC60770

Damping Time

Damping time of amplifier	0-100 s adjustable
Diaphragm capsule (isolated diaphragm and silicon oil filling) damping time	≤0.2 s
Start-up after power off	≤6 s
Normal services after data recovery	≤3 s

Environmental Conditions

Working Temperature	-40 °F to 185 °F (-40 °C to 85 °C),
	Integrated LCD display: -4 °F to 158 °F (-20 °C to 70 °C)
Storage Temperature	-40 °F to 230 °F (-40 °C to 110 °C),
	Integrated LCD display: -40 °F to 185 °F (-40 °C to 85 °C)
Media Temperature	Silicon oil filling: -40 °F to 248 °F (-40 °C to 120 °C)
	Fluorocarbon oil filling: -49 °F to 320 °F (-45 °C to 160 °C)
Working Humidity	5-100% RH at 104 °F

Power Supply

Standard	10.5-55 VDC
HART Protocol	16.5-55 VDC, communication load resistance 250 Ω
Load Resistance	0-2119 Ω for working condition, 250- 600 Ω for HART protocol
Transmission Distance	<3281 ft
Power Consumption	≤500 mW at 24 VDC, 20.8 mA


Measuring Range and Limit

Nominal value	Smallest calibrated span	Lower range limit(LRL)	Upper range limit(URL)	Static pressure limit	High pressure side overload limit	Low pressure side overload limit
24 w.c. (6 kPa)	0.80 w.c. (200 kPa)	-24.11 w.c. (-6 kPa)	24.11 w.c. (6 kPa)	3625 psid (25 MPa)	3625 psid (25 MPa)	2320 psid (16 MPa)
160 w.c. (40 kPa)	1.60 w.c. (400 kPa)	-160.74 w.c. (-40 kPa)	160.74 w.c. (40 kPa)	5801psid (40 MPa)	3625 psid (25 MPa)	2320 psid (16 MPa)
1000 w.c. (250 kPa)	10 w.c. (2.5 kPa)	1000 w.c. (-250 kPa)	1000 w.c. (250 kPa)	5801psid (40 MPa)	3625 psid (25 MPa)	2320 psid (16 MPa)
145 psid (1MPa)	40 w.c. (10 kPa)	-72.5 psi (-500 kPa)	145 psid (1 MPa)	5801psid (40 MPa)	3625 psid (25 MPa)	2320 psid (16 MPa)
435 psid (3 MPa)	120 w.c. (30 kPa)	-72.5 psi(- 500 kPa)	435.11 psid (3 MPa)	5801 psid (40 MPa)	3625 psid (25 MPa)	2320 psid (16 MPa)
1450 psid (10 MPa)	401 w.c. (10 kPa)	-72.5 psi (-500 kPa)	1450.11 psid (10 MPa)	5801psid (40 MPa)	3625 psid (25 MPa)	2320 psid (16 MPa)

Installation


Liquid Flow Measurement

- Place taps to the side of the line to prevent sediment deposits on the transmitters process isolators
- Mount the transmitter beside or below the taps so gases can vent into the process line
- Mount drain/vent valve upward to allow gases to vent

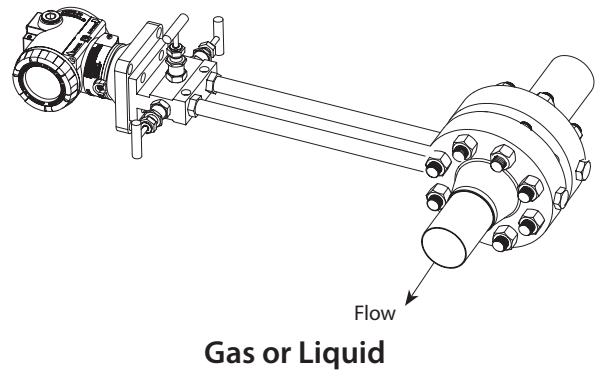


Gas Flow Measurement

- Place taps in the top or side of the line
- Mount the transmitter beside or above the taps so liquid will drain into the process line

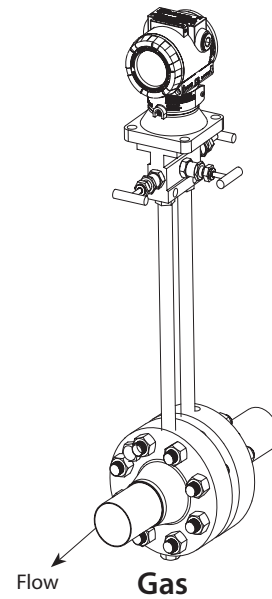

Steam Flow Measurement

- Place taps to the side of the line
- Mount the transmitter below the taps to ensure that the impulse piping will stay filled with condensate
- In steam service above 250 °F (121 °C), fill impulse lines with water to prevent the steam from contacting the transmitter directly and to ensure accurate measurement at start-up

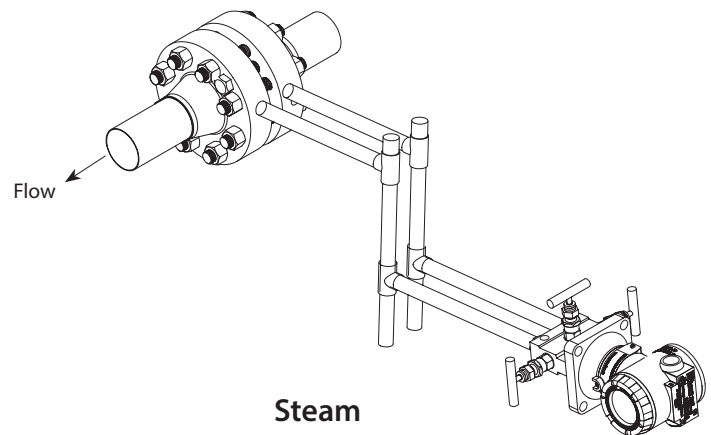

Note: For steam or other elevated temperature services, it is important that temperatures at the process connection do not exceed the transmitters process temperature limits.

Model Chart

Example	Tek-Bar 3110B-D	3	WP	1	HC	1	BA	Tek-Bar 3110B-D-3-WP-1-HC-1-BA
Series	Tek-Bar 3110B-D							Smart Differential Pressure Transmitter
Range Options		1 2 3 4 5 6						0 - 24" w.c. (30:1 Turndown, Adj. Range: -24" to +24" w.c.) 0 - 160" w.c. (100:1 Turndown, Adj. Range: -160" to +160" w.c.) 0 - 1000" w.c. (100:1 Turndown, Adj. Range: -1000" to +1000" w.c.) 0 - 145 psid (100:1 Turndown, Adj. Range: -72 to +145 psid) 0 - 435 psid (100:1 Turndown, Adj. Range: -72 to +435 psid) 0 - 1450 psid (100:1 Turndown, Adj. Range: -72 to +1450 psid)
Approval Rating			WP CSA					General Purpose NEMA 4X/IP66 CSA; CSA Class I Div I Explosion-proof
Process Connections				1 X				¼" NPT Female Diaphragm Seal
Diaphragm Material					HC			Hastelloy C
Electrical Connections						1		½" NPT Female
Options							CC FC BA BF TAG O	Custom Calibration with 5 point Calibration Certificate Factory Configuration, No Certificate Stainless Steel Bracket (Angle type) with SST Bolts Stainless Steel Bracket (Flat type) with SST Bolts Custom Etching of the Name Plate (Must specify on P.O.) ½"-14 NPTF, Oval Flange Process Connection Adapter (Includes 2 O-rings, an adapter, and 2 bolts)

Popular Models

Model Number	Description
3110B-D-1-WP-1-HC-1	DP Pressure Transmitter, 0-24" w.c., LCD
3110B-D-2-WP-1-HC-1	DP Pressure Transmitter, 0-160" w.c., LCD
3110B-D-3-WP-1-HC-1	DP Pressure Transmitter, 0-1000" w.c., LCD
3110B-D-4-WP-1-HC-1	DP Pressure Transmitter, 0-145 psid, LCD
3110B-D-5-WP-1-HC-1	DP Pressure Transmitter, 0-435 psid, LCD
3110B-D-6-WP-1-HC-1	DP Pressure Transmitter, 0-1450 psid, LCD

Customer Service & Support



TEKMATION LLC reserves the right to change the design and/or materials of its products without notice. The contents of this publication are the property of TEKMATON and cannot be reproduced by any other party without written permission. All rights reserved. Copyright © 2016 TEKMATON LLC
DOC # TEK/PO/CAT/200520/31108/1
TEKMATION LLC



www.tek-trol.com

Tek-Trol LLC

796 Tek Drive Crystal Lake, IL 60014,
USA
Sales: +1 847-655-7428

Tek-Trol Solutions BV

Florijnstraat 18, 4879 AH Etten-Leur,
Netherlands
Sales: +31 76-2031908

Tek-Trol Middle East FZE

SAIF Zone, Y1-067, PO BOX No.
21125, Sharjah, UAE
Sales: +971-6526-8344

Support: +1 847-857-6076

Email: tektrol@tek-trol.com

www.tek-trol.com

Tek-Trol is a fully owned subsidiary of TEKMATON LLC. We offer our customers a comprehensive range of products and solutions for process, power and oil & gas industries. Tek-Trol provides process measurement and control products for Flow, Level, Temperature & Pressure measurement, Control valves & Analyzer systems. We are present in 15 locations globally and are known for our knowledge, innovative solutions, reliable products and global presence.