



Technology Solutions

TEK-SUB 4800B

Submersible Level Transmitter



LEVEL




Introduction

The Tek-Sub 4800B Submersible Level Transmitter is a high-performance level transmitter specially designed for measuring the level of liquids and slurries. The transmitter has a highly accurate silicon piezoresistive pressure sensor as a sensing element. It is capable of continuously sensing and measuring liquid level with high precision.

Tek-Trol's Submersible Level Transmitters have several level ranges, output options, and custom cable lengths, ensuring a perfect fit for new or existing installations. They are frequently used with a SCADA, PLC, or compatible display/control system for liquid level indication or control.


Measuring Principle

The Tek-Sub 4800B Submersible Level Transmitter consists of a sensor attached to a long cable, which is lowered to the bottom of a tank or well. The sensor operates by measuring the hydrostatic pressure of the liquid. Hydrostatic pressure (or head pressure) is the pressure exerted by the liquid in the tank or well. The hydrostatic pressure measured by the sensor is determined by two parameters: the density and height of the liquid. With liquid density remaining constant, changes in hydrostatic pressure necessarily reflect a difference in liquid level.

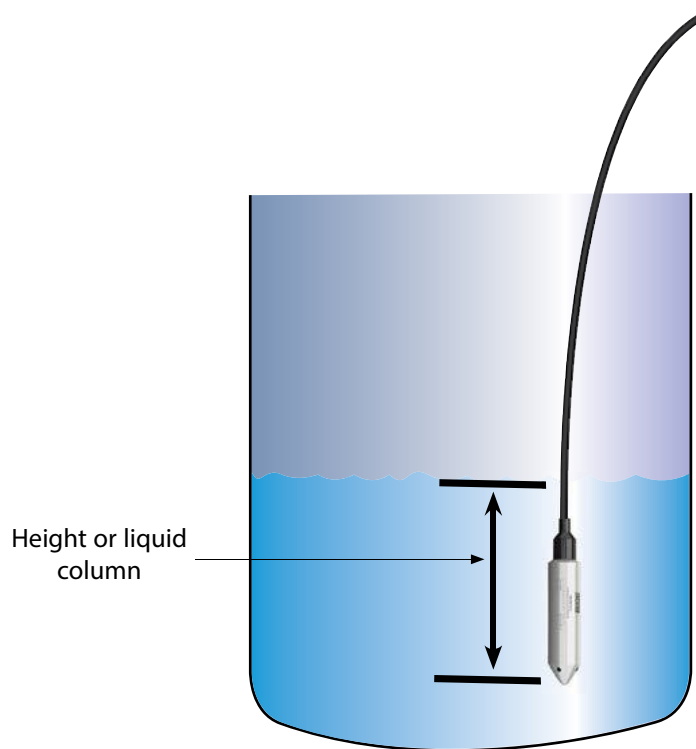

Operation

Typical Tek-Sub 4800B Submersible Level Transmitter application.

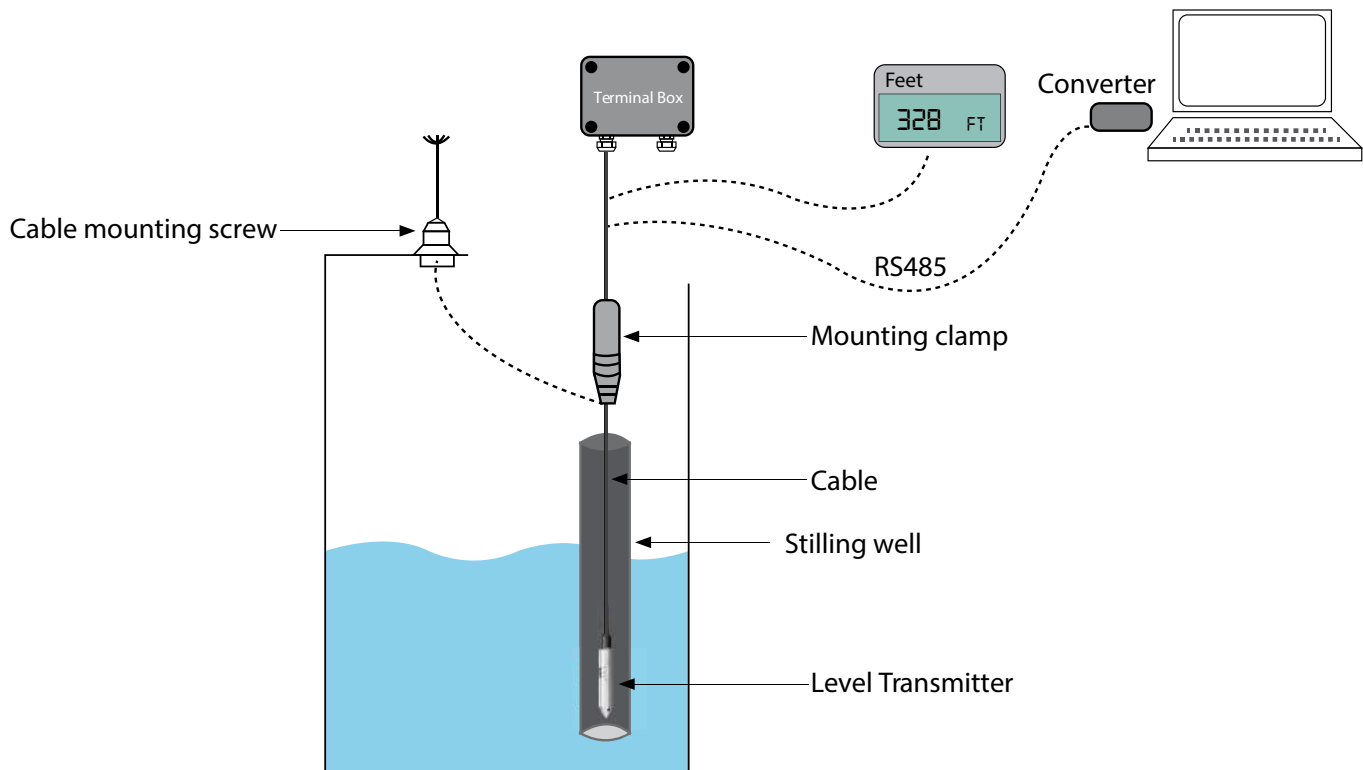

The pressure at the bottom of the tank is related to the height of the liquid. This pressure is called hydrostatic pressure or head pressure. Typical units for measurement of hydrostatic pressure are inches, feet, or meters of water column. In a water column, the hydrostatic pressure of 27.7" w.c. is approximately equivalent of 1 PSI. The volume of water or shape of the tank or vessel does not affect the hydrostatic head pressure; as it is height of water that affects the pressure. Whether it is in a large water tank or a small bucket of water, the hydrostatic pressure of 27.7" w.c. is the same.

Modern PLC's and HMI's can calculate the liquid level of a tank by entering the geometry of the tank and the specific gravity of the liquid.


Features

- Compact design
- Shielded cable with vent tube
- Completely sealed, stainless steel transmitter
- Temperature compensated
- No need for external adjustment and calibration
- Low maintenance, no moving parts
- Standard Output 4-20 mA, RS-485, 0.5-4.5 VDC
- Accuracy: $\pm 0.5\%$ FS

Applications

- Water and wastewater treatment plants
- Beverages packaging plants
- Well monitoring
- Hydraulic level monitoring in sea, rivers, lakes and dams
- Chemical applications
- Muddy liquid, slurry level measurement
- Ground water monitoring
- Environmental remediation
- Water tanks
- Leachate monitoring

Dimensional Drawing

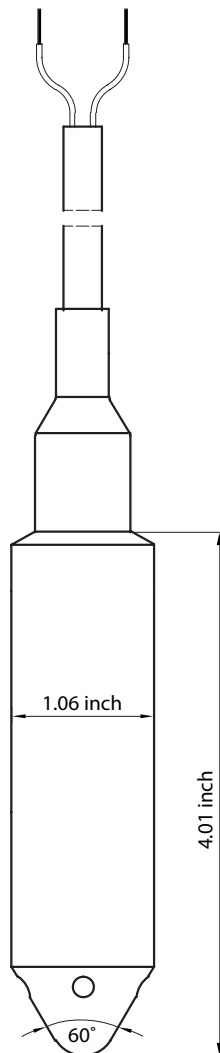

Specifications

Pressure range	5 psig to 20 psig (3.5 mH ₂ O to 14 mH ₂ O), Optional ranges available
Pressure type	Gauge (vented)
Over pressure	150% FS
Accuracy	±0.5% FS
Temperature coefficient-zero	±0.75% FS (typ.), ±1.5% FS (max.) Over compensated temperature range
Temperature coefficient-span	±0.75% FS (typ.), ±1.5% FS (max.) Over compensated temperature range
Long term stability	±0.2% FS/year (typ.), ±0.3% FS/year (max.)
Output signal	4-20 mA, RS-485, 0.5-4.5 VDC
Power supply (Vs)	12 to 36 VDC
Load resistance (R _L)	$R_L < (V_s - 12) / 0.02A$
Vibration	10g-force (20-2000 Hz)
Shock	100g-force (10 ms)
Cycles	10x10 ⁶ cycles
Insulation resistance	100 MΩ/50 VDC
Compensated temperature range	32 °F to 140 °F (0 °C to 60 °C)
Storage temperature range	-40 °F to 257 °F (-40 °C to 125 °C)
Housing	304 SS
Cable	PTFE or Polyurethane
Diaphragm	316L SS
Seal ring	Viton
Oil filling	Silicone oil
Weight	0.9 lbs (408 g)


Installation

The Tek-Sub 4800B Submersible Level Transmitter is suitable for static, as well as flowing liquid level measurement applications. The transmitter is factory calibrated and ready for operation without adjustment.

- Ensure that the measuring liquid is compatible with the transmitter's construction material
- Insert the transmitter vertically down in the measurement container
- Ensure that the transmitter is completely immersed in the liquid for maximum accuracy
- Ensure the protection cap holes are not blocked due to suspended particles in the measuring liquid
- Avoid areas subject to electrical noise, excessive vibrations and radiant heat while mounting the transmitter


Static Liquid

Place the transmitter away from liquid resource to avoid effects of vibration and pressure influence. A stilling well is recommended for the best results.

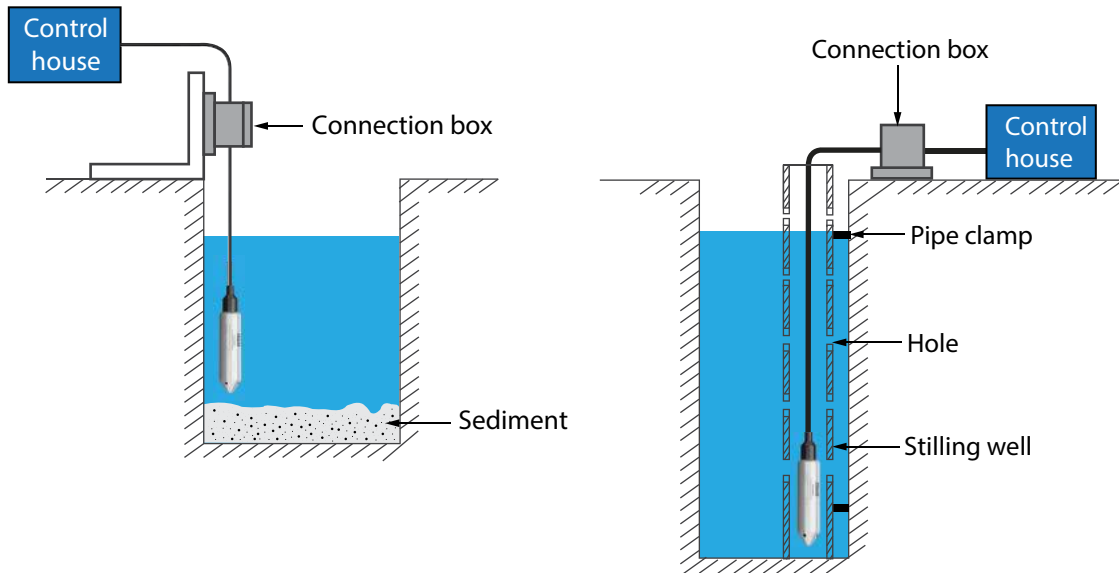

Flowing Liquid

A stilling well is recommended when there is a flowing liquid. A stilling well will dampen disruptions and provide a steady level for an accurate measurement.

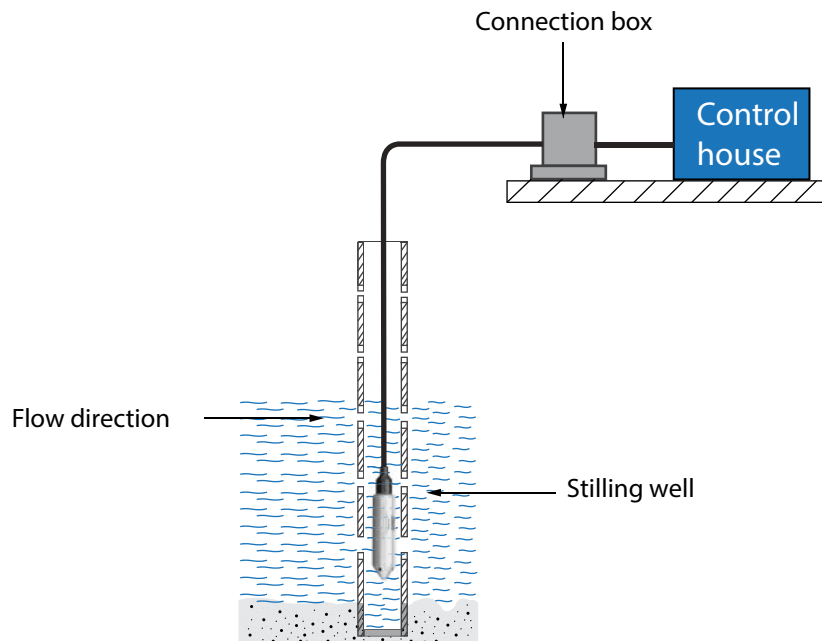

Model Chart

Example	Tek-Sub 4800B	05	42	05	P14	Tek-Sub 4800B-05-42-05-P14
Series	Tek-Sub 4800B					Submersible Level Transmitter
Range Options		05 10 15 20				5 psig (3.5 mHzO) 10 psig (7 mHzO) 15 psig (10.5 mHzO) 20 psig (14 mHzO)
Output			42 43 45 49			4-20 mA 4-20 mA with HART 0.5-4.5 VDC RS-485
Accuracy				05		0.5% FS
Cable Length and Type					P14 P20 P34 T14 T20 T34	40' of Polyurethane Cable 60' of Polyurethane Cable 100' of Polyurethane Cable 40' of PTFE Cable 60' of PTFE Cable 100' of PTFE Cable

Popular Models

Model Number	Description
4800B-05-42-05-P14	Submersible Level Transmitter, Range 5 psig, 40' Polyurethane Cable
4800B-10-42-05-P14	Submersible Level Transmitter, Range 10 psig, 40' Polyurethane Cable
4800B-15-42-05-P20	Submersible Level Transmitter, Range 15 psig, 60' Polyurethane Cable
4800B-20-42-05-P20	Submersible Level Transmitter, Range 20 psig, 60' Polyurethane Cable
4800B-15-42-05-P34	Submersible Level Transmitter, Range 15 psig, 100' Polyurethane Cable
4800B-05-42-05-T14	Submersible Level Transmitter, Range 5 psig, 40' PTFE Cable
4800B-10-42-05-T14	Submersible Level Transmitter, Range 10 psig, 40' PTFE Cable
4800B-15-42-05-T20	Submersible Level Transmitter, Range 15 psig, 60' PTFE Cable
4800B-20-42-05-T20	Submersible Level Transmitter, Range 20 psig, 60' PTFE Cable
4800-HANGER	Cable Hanger

Cable Hanger



Customer Service and Support



TEKMATION LLC reserves the right to change the designs and/or materials of its products without notice. The contents of this publication are the property of TEKMATON and cannot be reproduced by any other party without written permission. All rights reserved. Copyright © 2016 TEKMATON LLC
DOC # TEK/AV/180612/TEK-SUB/G
TEKMATION LLC



www.tek-trol.com

Tek-Trol is a fully owned subsidiary of TEKMATON LLC. We offer our customers a comprehensive range of products and solutions for process, power, and oil and gas industries. Tek-Trol provides process measurement and control products for Flow, Level, Temperature and Pressure measurement, Control valves and Analyzer systems. We are present in 15 locations globally and are known for our knowledge, innovative solutions, reliable products, and global presence.

Tek-Trol LLC

796 Tek Drive Crystal Lake, IL 60014 USA

Tel: +1 847 857 6076, +1 847 655 7428 Fax: +1 847 655 6147

Email : tektrol@tek-trol.com

www.tek-trol.com